



PNEUMATIC STRAPPING TOOL FOR POLYPROPYLENE AND POLYESTER STRAP WITH VIBRATION SEALING

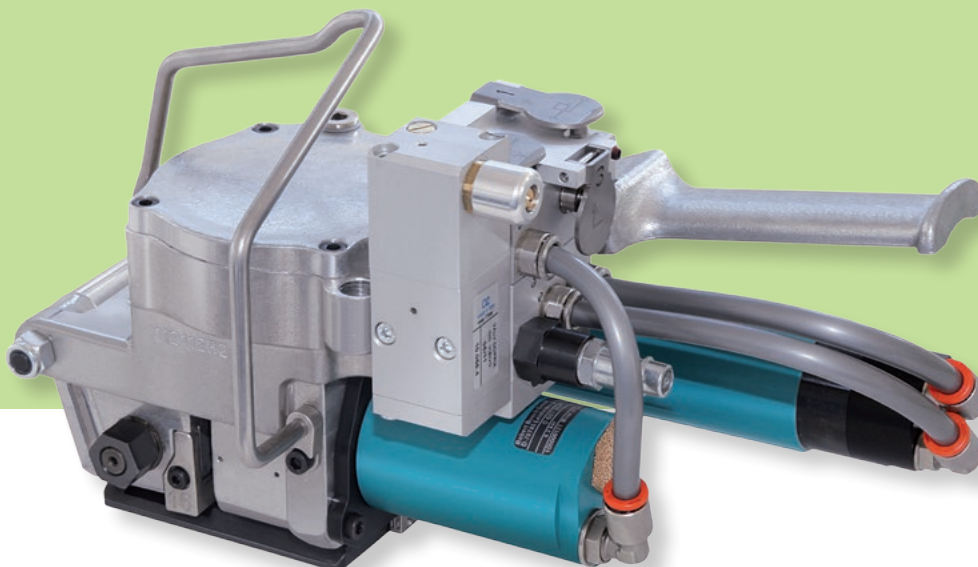

New cooling welding time indicator



TECHNICAL SPECIFICATIONS

DIMENSIONS

Length	300 mm • 11"
Width	150 mm • 6"
Height	175 mm • 6.9"
Weight	5.1 Kgs • 11.2 lbs

FEEDING

Pressure range	4.5 -7 bar / 64-99 psi
Air consumption	14 L/s - 29 cuft/min

PERFORMANCE


Max. tension force	3500 N - 6.5 bar - 92 psi
Tensioning speed	9 mt/m
Sealing	Vibration sealing
Joint strength	80% of breaking strength*

* variable according to strap type

MODEL

CODE	TYPE	STRAP	THICKNESS
T111323	ITA11 / 13mm	PP-PET	0.7-1.4 mm 0.028" - 0.055"
		13 mm • 1/2"	
T119923	ITA11 / 16-19mm	PP-PET	0.7-1.4 mm 0.028" - 0.055"
		16-19 mm • 5/8"-3/4"	


POLYESTER STRAP



POLYESTER STRAP



POLYPROPYLENE STRAP



ITATOOLS s.r.l.

Via Rossini, 340 - 21042 Caronno Pertusella (VA) - ITALY • p.iva 05022340961

Tel.: +39.02.96450619 - Fax +39.02.9659747 • E-mail: info@itatools.it - www.itatools.com